

VTE-250 Process Viscometer

...for systems open to the atmosphere

In-line
automatic
viscosity
control

Digital Display

Output signal
4-20mA

Economically
priced

Universal
mounting
bracket

Sample Chamber
–Durable and
easily cleaned
– Available in
plastic or
stainless steel

Quick Connect
Fittings



Selectable readout
directly in cP or
units of choice
(cup seconds or other
engineering units)

New Easy to Use
Controls

Simple to install,
start up, operate
and clean

Viscosity Range:
10-10,000 cP
(mPa·s)

Easy viscosity range change
can be made without special
tools or recalibration

Automatically operates
with 90-264 VAC, 47-63 Hz
20 watts power supply

Built-in control feature:
(up to 3 amp solenoid relay)

BROOKFIELD VISCOMETERS

T: 800.628.8139 or 508.946.6200 F: 508.946.6262 www.brookfieldengineering.com

What's Available?


VTE-250 In-Line Viscometer

Optional Accessories

Sample chambers, plastic or stainless steel
Solenoid Control Valve
Solvent Bottle
Test Stand, stationary or with wheels
Mounting Brackets
Additional Spindles
Viscosity Standards

Applications

Adhesives
Ceramic Slurries
Chemicals
Coatings
Cosmetics
Creams
Dairy Products
Food Products
Gels
Inks
Juices
Oils
Paints
Paper Coatings
Petroleum Products
Starches
Varnishes
Waxes

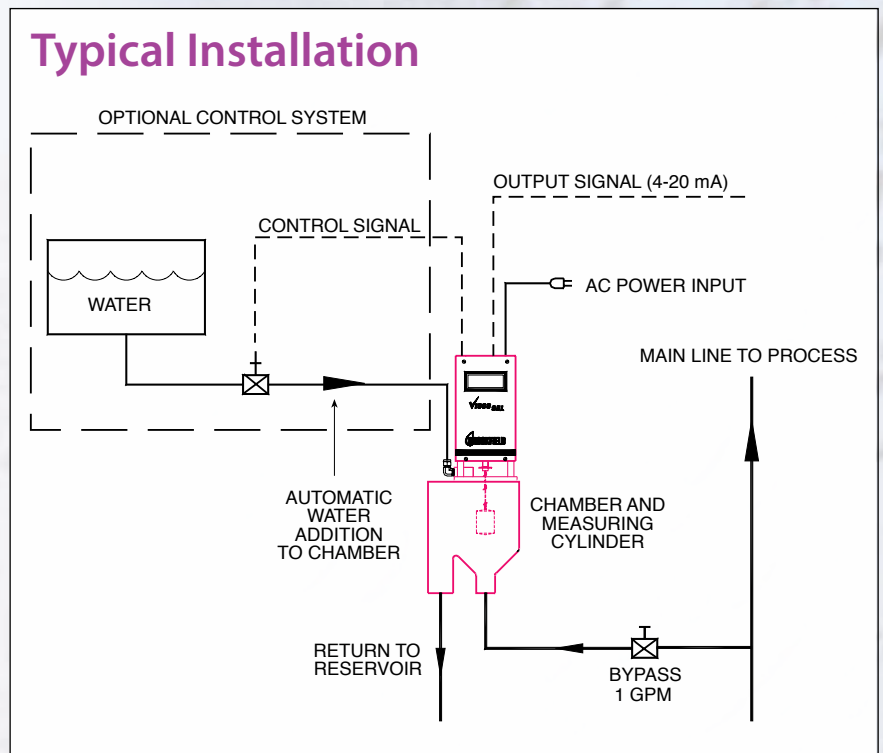

The Brookfield Viscosel has been “the standard” for viscosity control of ink and coating applications for decades. New enhancements make the Viscosel Series Viscometer an easy choice.

BROOKFIELD

Brookfield Engineering Laboratories, Inc.

11 Commerce Boulevard
Middleboro, MA 02346-1031 USA
T: 800.628.8139 or 508.946.6200 F: 508.946.6262
W: www.brookfieldengineering.com